



Experimental investigation of thermo-physical properties of soil using solarisation technology

Citation:

Gatea Al-Shammary, Ahmed Abed, Kouzani, Abbas, Kaynak, Akif, Khoo, Sui Yang and Norton, Michael 2017, Experimental investigation of thermo-physical properties of soil using solarisation technology, *American journal of applied sciences*, vol. 14, no. 7, pp. 649-661.

DOI: [10.3844/ajassp.649.661](https://doi.org/10.3844/ajassp.649.661)

© 2017, The Authors

Reproduced by Deakin University under the terms of the [Creative Commons Attribution Licence](#)

Downloaded from DRO:

<http://hdl.handle.net/10536/DRO/DU:30101171>

Experimental Investigation of Thermo-Physical Properties of Soil Using Solarisation Technology

^{1,2}Ahmed Abed Gatea Al-Shammary, ¹Abbas Kouzani,
¹Akif Kaynak, ¹Sui Yang Khoo and ¹Michael Norton

¹School of Engineering, Deakin University, Geelong, VIC 3216, Australia

²Departments of Soil Science and Water Resources, College of Agriculture, University of Wasit, Kut, Iraq

Article history

Received: 19-04-2017

Revised: 10-06-2017

Accepted: 17-07-2017

Corresponding Author:

Ahmed Abed Gatea
Al-Shammary
School of Engineering, Deakin
University, Geelong, VIC 3216,
Australia
Tel: +61-3-52272818
Mobile: +61-434096831
Fax: +61-3-52272167
Email: agatea@deakin.edu.au

Abstract: Soil Thermo-Physical Properties (TPP) depend on heat transfer in the soil. This paper presents a study on different soil solarisation technologies influenced by soil TPP. This study evaluates three factors: The tillage depth for soil at three levels (15, 25 and 45 cm), the number of plastic film at three levels (single, double and without plastic film) and three cases of fertilizers (chemical fertilizer, organic fertilizer and without fertilizer). The parameters explored in this study include soil bulk density (Mg/cm^3), soil porosity (%), soil volumetric moisture content (cm^3/cm^3) and soil thermal diffusivity (m^2/sec). Data management and analysis were performed using SAS 9.1 statistical software and the spilt-plot under Randomized Complete Block Design (RCBD). The results show that soil Tillage Depth (TD) strongly influences TPP, as well as a significant effect on soil bulk density (ρ_b), porosity (Φ), volumetric moisture content (θ) and thermal diffusivity (D). The results also reveal that a tillage depth of 15 cm produces lower values of ρ_b , θ and D (1.25 Mg/cm^3 , $0.131 \text{ cm}^3/\text{cm}^3$ and $1.24 \times 10^{-6} \text{ m}^2/\text{sec}$, respectively) and a higher value of Φ (52.78%). In addition, the finding indicates that ρ_b is increased by increasing TD. There was a significant positive correlation between the number of plastic film and parameters studied. The soil double plastic film produced lower values of ρ_b and D for soil (1.253 Mg/cm^3 , $7.76 \times 10^{-7} \text{ m}^2/\text{sec}$). However, it recorded higher values for Φ and θ for soil (52.70% and $0.231 \text{ cm}^3/\text{cm}^3$, respectively). Furthermore, the current study shows significant differences between the types of fertilizers on ρ_b . Organic Fertilizer (OF) obtained a lower value of ρ_b (1.2 Mg/m^3), compared with chemical fertilizer and without fertilizer (1.28 and 1.31 Mg/m^3 , respectively). In contrast, contrary to expectations, this study did not find significant differences between the types of fertilizer on D and θ for soil. A positive correlation was found in the interaction between the studied factors in the parameters. Furthermore, D increased with increasing soil bulk density (ρ_b) and tillage depth.

Keywords: Soil Tillage Depth, Number of Plastic Film, Organic Fertilizer, Soil Bulk Density, Soil Thermal Diffusivity

Introduction

Soil Thermo-Physical Properties (TPP) are widely used parameters of soil physics in the field of agricultural and especially in applications concerning soil energy balance (Alrtimi *et al.*, 2016; An *et al.*, 2016; Andújar Márquez *et al.*, 2016; Genesisio *et al.*, 2012; Logsdon *et al.*, 2010; Rajeev and Kodikara, 2016; Ravazzani *et al.*, 2015; Usowicz *et al.*, 2016; Wu *et al.*,

2017; Xiukang *et al.*, 2015). Consequently, knowledge of TPP is required to accurately predict soil temperature (Hu *et al.*, 2016). Soil Solarisation Technology (SST) is an important practical method of increasing soil temperature by using solar radiation, playing a key role in improving and controlling soil properties, including in crop fields (Keesstra *et al.*, 2016; Moreno *et al.*, 2016). SST is also the main factor for analysing Organic Matter (OM) in soil (Conant *et al.*, 2011; Grunwald *et al.*, 2017;

Li *et al.*, 2016). Furthermore, SST overpowers weed growth (Kader *et al.*, 2017; Mutetwa and Mtaita, 2014). SST strongly affects the establishment of microclimates that lead to increased fertilizer productivity in soil, reduces soil irrigation consumption (Cerdà *et al.*, 2016; Jiang *et al.*, 2017; Mahdavi *et al.*, 2017; Wu *et al.*, 2017; Zhou *et al.*, 2017), affects soil temperature (Al-Shammery and Al-Sadoon, 2014; Al-Shammery *et al.*, 2016) and improves the physical structure of soil (Dec *et al.*, 2009).

Soil Thermo-Physical Properties (TPP) are soil thermal conductivity (k), volumetric heat capacity (C_v) and thermal diffusivity (D). They strongly depend on soil bulk density (ρ_b), porosity (Φ) and gravimetric water content (θ) for soil (Alrtimi *et al.*, 2016; Levy and Schmidt, 2016; Lu and Dong, 2015; Mondal *et al.*, 2016; Ravazzani, 2017; Usowicz *et al.*, 2013; Zhang *et al.*, 2017). There are several studies in the literature that estimate TPP under different conditions.

Williams *et al.* (2016) observed that the relationship between soil tillage management and hydrothermal properties influences soil structure and increases crop production. In addition, Al-Shammery and Al-Sadoon (2014) reported a significant differences between tillage depth and soil thermal properties. Their results show that thermal conductivity (K) is increased with increasing soil depth. Consequently, increasing ρ_b and water content (w) with increasing TD.

Other studies Chaudhari *et al.* (2013); Li *et al.* (2017); Merante *et al.* (2017) have found that Organic Fertilizer (OF) can improve soil physical properties. OF has a positive effect on soil bulk density (ρ_b) and porosity (Φ) because improving soil biological fertility. Celik *et al.* (2010); Li *et al.* (2017) studied the effects of Organic Fertilizer (OF) on SPP. They noted that OF significantly reduced soil bulk density (ρ_b). Therefore, OF can help improving soil structure as well as ρ_b depend on different factors, For example, compaction, consolidation and the amount of organic matter present in the soil. Furthermore, Pires *et al.* (2017); Alam and Salahin (2013) indicated that soil porosity (Φ) is influenced by the tillage system. They found that soil porosity decreases with soil depth.

Liang *et al.* (2017) Qin *et al.* (2015); Xiukang *et al.* (2015); Jabran *et al.* (2016); Wu *et al.* (2017); Ingman *et al.* (2015) all found that Soil-Mulching Systems (SMS) had a positively influence on soil heat transfer and soil evaporation. As a result, SMS was more useful for reducing soil moisture losses. They observed also that SMS reduces the temperature of the soil.

Soil thermal conductivity (K) depends on (ρ_b), (Φ) and (θ) (Łydzba *et al.*, 2016; Tokoro *et al.*, 2016), as well as Soil Mineral Composition (SMC) and texture (Tokoro *et al.*, 2016). Usowicz *et al.* (2013); Pramanik *et al.* (2015) found that Soil Solarisation Technology (SST) had a positively impact on soil temperature because It

influenced the soil thermal regime by controlling for radiation balance and soil thermal conductivity (K), as well as volumetric heat capacity (C_v) in soil.

Ingman *et al.* (2015); Merante *et al.* (2017); Roxy *et al.* (2014); Gan *et al.* (2012) demonstrated that the K and C_v of soil are significantly impacted by soil moisture content. Furthermore, the results of their study identified increased K and C_v with soil depth. Jabro *et al.* (2016); Chaudhari *et al.* (2013) demonstrated that soil Tillage Depth (TD) has an influence on soil physical properties. They found that ρ_b was significantly increased by soil TD. In contrast, other studies presented the contradictory result that tillage depth made no significant difference to ρ_b (Jabro *et al.*, 2016; Karuma *et al.*, 2014).

Gnatowski (2009); Levy and Schmidt (2016) found that soil thermal diffusivity (D) is a fundamental property for studying the thermal process of soil. The results of their study indicate that D depends on moisture content because D is increased by increasing volumetric moisture content in soil. Tong *et al.* (2017) argued that D is related to soil temperature changes. Their results indicated that D depended on soil thermal conductivity (K). Miyajima *et al.* (2015); Usowicz *et al.* (2016); Roxy *et al.* (2014) showed that soil thermal diffusivity (D) is amplified by increasing the soil bulk density and moisture content. However, Makarychev and Bolotov (2017) observed that soil thermal diffusivity (D) is decreased by increasing moisture content. Levy and Schmidt (2016) discovered that soil thermal diffusivity (D) significantly increased with increasing soil depth.

The objective of this study is to investigate the effect of soil solarisation technology on soil thermal diffusivity. Furthermore, the study examines the influence of soil tillage depth, number of plastic films and fertilizer type on soil bulk density, soil volumetric moisture content and soil porosity.

Materials and Methods

The field experiment involved studying a soil solarisation technology influenced by some soil thermal-physical properties: Soil bulk density (ρ_b), porosity (Φ), gravimetric water content (θ) and soil thermal diffusivity (D) for Silty Clay (SIC). Soil specifications are shown in Table 1. The research procedure involved several steps. Firstly, the field allocated to the study experiments was cleared of plant waste and then soil samples for silty clay were used to blend the tissue from the continuous field with a three depths (0-15, 15-25 and 25-45 cm) after smoothing and passing it through a 2 mm diameter sieve and drying it under the sun. Several models were used to analyse the physical and chemical properties of the soil, Soil Mechanical Analysis has classified under (Triangular diagram) according to the "Modern American Classification" the procedure used by (Vogt *et al.*, 2015), Soil texture was determined by hydrother meter method

and the Electric Conductivity (EC) was done according to the procedure of (Krishna, 2016), Ph soil was prepared according to the procedure used by (Vogt *et al.*, 2015), Organic matter by (Kroetsch and Wang, 2007). For the experiments, three factors were selected: (i) Three soil depths for tillage systems (15,25 and 45 cm), (ii) Three levels for number of plastic films(single, double and without-plastic film) and (iii) Three fertilizer types (chemical fertilizer type [0.07 kg/2m² Triple Superphosphate TSP added, equivalent to 350 kg/ha], organic fertilizer [0.05 kg/2m² humic acid added, equivalent to 250 kg/ha] and without fertilizer). Each treatment area was 2 m², making a total experiment area of 162 m². The experiment included 27 treatments ×3 replicates, making a total of 81 experimental treatment units, as shown in Fig. 1. The procedures of this study were tested by analysis of variance and least significant differences were compared averages at a probability the 5% level using a split-split plot under the randomized Complete Block Design (RCBD). In addition, the study used a tractor Same Explorer 85 DT and Disc Plough for the purpose of ploughing to three level depths (15, 25 and 45 cm) and then disc harrows to smooth the soil as shown (Appendix 2 and 3). In the next step, the experimental field was irrigated to full capacity (100%) by using surface Irrigation method. The experimental field unit was covered with plastic films (single, double) after 48 h from irrigation process. Transparent polyethylene film was used for soil solarisation technology, which was 0.5 mm thick, 600 mm width. It is proven by the polyethylene film with the soil surface, it has been properly rolled so that it is perfectly attached to the soil surface purpose increasing solarisation efficiency and Wear plastic straps at least two places to prevent dusting. Finally, calculations of soil bulk density (Mg/m³), soil porosity (%), soil volumetric moisture content (cm³/cm³) and soil thermal Diffusivity (*D*) were carried out after removing the covers from all three treatment areas. Analysis of Variance (ANOVA table) for parameter studied represented by mean square error (appendix 1).

Mathematical Calculations

Soil Bulk Density, Porosity and Volumetric Moisture Content

Soil bulk density (ρ_b) was measured by the volumetric cylinder method. With this method, a cylindrical metal sampler with a removable sample cylinder that fits inside it was pressed into the soil to depths of 15, 25 and 45 cm and carefully removed to preserve a known volume of soil in the cylindrical sample with a height of 7 cm and a diameter 5 cm. The soil sample was dried at 105°C for 24 h and then weighed. Bulk density (ρ_b) is the oven-dried mass (m_s) divided by the field volume of the sample (v_i), as shown in the following equation (Smith, 2000):

$$\text{Bulk density } (\rho_b) = \frac{M_s (M_g)}{V_i (m^3)}$$

where, M_s is the oven dry weight of soil (Mg) and V_i is the volume of soil sample (m³).

Total porosity (Φ) is defined as the percentage of the bulk volume not occupied by solids, calculated by the following equation (Smith, 2000):

$$\text{Porosity } (\phi) = 1 - \frac{\rho_p \left(\frac{M_g}{m^3} \right)}{D_p \left(\frac{M_g}{m^3} \right)}$$

where, ρ_b is soil bulk density (Mg/m³) and D_p is soil particle density (Mg/m³).

Furthermore, the volumetric moisture content (cm³/cm³) was calculated by gravimetric methods (p_w) of field soil at a depth of 0-45 cm. This involved first weighing the wet samples of all treatments and then oven-drying the samples at 105°C for 24 h. The moisture percentage in the soil samples (p_w) on a wet-dry mass basis was obtained by dividing the difference between the wet and dry samples and multiplying by 100. Where the bulk density (ρ_b) of a sample is known, the volume-basis water content (θ) may be obtained by the following equation (Smith, 2000):

$$\text{Volumetric moisture content } (\theta) = \frac{p_w * \rho_b}{\rho_w}$$

where, θ is the volumetric moisture content (cm³/cm³), ρ_w is the moisture content by weight (%), ρ_b is the soil bulk density (Mg/m³) and ρ_w is the water density (Mg/m³).

Soil Thermal Diffusivity (m²/sec):

Soil Thermal Conductivity (W/mk)

The soil thermal conductivity (*K*) of silt clay was calculated by using the following equation (Kersten, 1949):

$$K = [0.9 \log w - 0.2] 10^{0.017d}$$

where, w is the moisture content (%) and γ is the dry density (gm/cm³).

Soil Volumetric Heat Capacity (J/m³k)

The soil volumetric heat capacity (C_v) was calculated with reasonable accuracy from the volumetric water content (θ) and soil bulk density (ρ_b) (Evelt *et al.*, 2012):

$$C_v = \frac{2.01 \times 10^6 \rho_b}{2.65 + 4.19 \times 10^6 \theta}$$

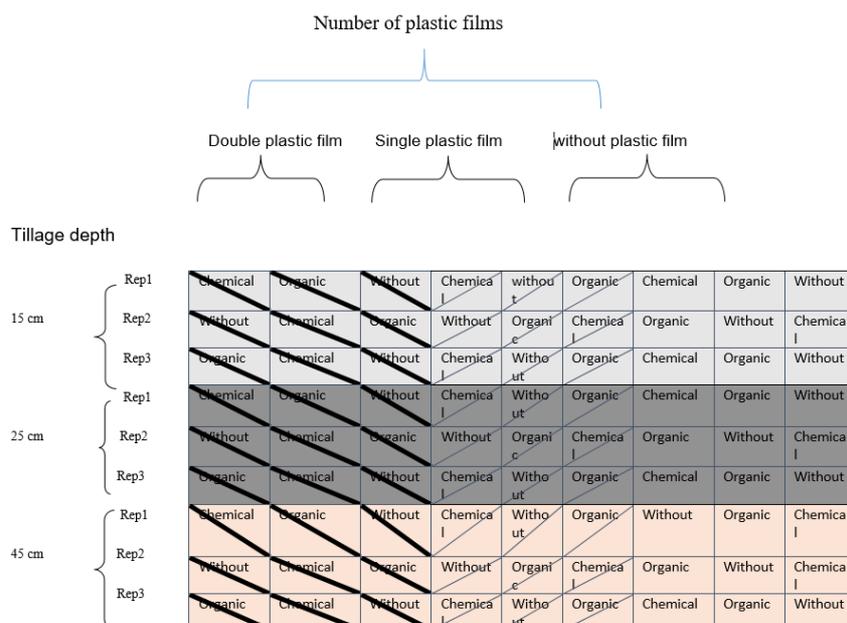


Fig. 1. Schematic diagram of the experimental field design

Table 1. Characterization of soil profile.

Soil properties										
Physical										
Depth of soil (cm)	Bulk density (Mg/cm ³)	Porosity (%)	Soil mechanical analysis			Chemical				
			Silty Clay (SIC)			ph	EC ds/m	N Mg/kg	P Mg/kg	K Mg/kg
Silt gm/kg	Clay gm/kg	Sand gm/kg								
0-15	1.31	50.49	407	468	125	6.90	2.63	30.63	7.54	407.20
15-25	1.33	49.66	408	454	138	6.82	3.82	27.50	10.00	420.40
25-45	1.38	47.88	426	412	162	6.58	3.95	25.56	10.00	430.50

Soil Thermal Diffusivity (m²/sec)

Soil diffusivity is defined as the ratio of thermal conductivity to volumetric heat capacity (Hillelm, 1998):

$$D = \frac{K}{C_v}$$

where, *D* is the soil thermal diffusivity (m²/sec), *K* is the thermal conductivity (W/mK) and *C_v* is the volumetric heat capacity (J/m³k).

Results and Discussion

Influence of the Studied Factors on Soil Bulk Density (Mg/m³)

Table 2 shows the influence of soil Tillage Depth (TD), number of Plastic Films (PF) and Fertilizer Type (FT) on the soil bulk density (*ρ_b*). The results show a significant difference in tillage depth in soil bulk density.

The soil bulk density increased from 1.25 to 1.27 Mg/cm³ when increasing soil TD from 15 to 25 cm. The increasing rate was 16.8%. *ρ_b* also increased to 1.31 Mg/cm³ at an increasing rate of 36% and an increasing tillage depth of 45 cm. This result may be due to the gradual increase in soil bulk density with increasing soil depth. These results match those observed by (Bennett *et al.*, 2017; Keesstra *et al.*, 2016; Tamminen and Starr, 1994; Romaneckas *et al.*, 2009).

The number of Plastic Films (PF) caused significant variation in *ρ_b*. The double-plastic films treatment produced the lowest soil bulk density (1.25 Mg/cm³) compared with the single-plastic films and without plastic films treatments (1.27, 1.31 Mg/m³, respectively). The reason for this result may be twofold: the increasing soil temperature at the soil surface and the decomposition of organic fertilizer by microorganisms, which would decrease soil bulk density compared with single-plastic films and without plastic films. This finding is in agreement with (Conant *et al.*, 2011; Al-Shammary *et al.*, 2016; Li *et al.*, 2016; Grunwald *et al.*, 2017).

Table 2. Effect of tillage depth, number of plastic films and fertilizer type on bulk density (Mg/cm^3)

Tillage Depth (cm) (TD)	Number of Plastic Films (PF)	Average ρ_b (Mg/m^3) on interaction triple Fertilizer Type (FT)			Interaction tillage depth and number of plastic films
		Chemical	Organic	Without	
15	Single	1.25	1.22	1.26	1.24
	Double	1.24	1.20	1.25	1.23
	Without-plastic film	1.28	1.26	1.29	1.27
25	Single	1.28	1.26	1.30	1.28
	Double	1.25	1.23	1.30	1.26
45	Without-plastic film	1.28	1.26	1.30	1.28
	Single	1.28	1.27	1.36	1.27
	Double	1.24	1.24	1.32	1.25
Without-plastic film		1.37	1.37	1.38	1.31
Average of fertilizer type		1.27	1.25	1.30	LSD 0.05
Tillage Depth (cm) (TD)	Fertilizer Type (FT)	Average ρ_b (Mg/m^3) on Interaction Tillage Depth and Fertilizer Type	Average ρ_b (Mg/m^3) on Tillage Depth (TD)	Tillage depth = 0.025, Number of plastic Films = 0.025, Fertilizer Type = 0.025	
15	Chemical	1.25		1.25	Tillage depth X Number of plastic Films = 0.018
	Organic	1.22			Tillage depth X Fertilizer = 0.018
	Without	1.26			Number of plastic Films X fertilizer Type = 0.026
25	Chemical	1.27		1.27	Tillage depth X Number of plastic Films X Fertilizer Type = 0.006
	Organic	1.25			
45	Without	1.30			
	Chemical	1.30		1.31	
	Organic	1.29			
Without		1.35			
Number of Plastic Films (PF)	Fertilizer Type (FT)	Average ρ_b (Mg/m^3) on Interaction of the number of Plastic Films (PF) and fertilizer type		Average ρ_b (Mg/m^3) on the Number of Plastic Films (PF)	
Single	Chemical	1.27	1.27		
	Organic	1.25			
	Without	1.30			
Double	Chemical	1.24	1.25		
	Organic	1.22			
	Without	1.29			
Without-plastic Film	Chemical	1.31	1.31		
	Organic	1.29			
	Without	1.32			

A significant difference in soil bulk density (ρ_b) is obtained for fertiliser types. The soil with Organic Fertilizer (OF) showed a lower value of ρ_b ($1.25 Mg/m^3$) compared with Chemical Fertilizer (CF) and no Fertilizer (WF) (1.27 and $1.30 Mg/m^3$, respectively). The reason for this result might be that the application of organic fertilizer normally reduces ρ_b of soil due to the higher organic matter content of the soil. These results agree with the findings of (Celik *et al.*, 2010; Li *et al.*, 2017), who reported the relevance of the application of organic matter to the improvement in physical and chemical properties of the soil. The interaction between Tillage Depth (TD) and number of Plastic Films (PF) showed a positive correlation in ρ_b values, with the lowest value of ρ_b showing at TD15 cm + double-

plastic films at $1.23 Mg/cm^3$. In contrast, the highest ρ_b value ($1.31 Mg/m^3$) was obtained by TD 45 cm + without-plastic films treatment. Further analysis showed that there was a significant difference in the interaction between TD and FT on soil bulk density (ρ_b). The lower average ρ_b ($1.22 Mg/m^3$) was obtained for TD15 cm and Organic Fertilizer (OF) type, while the highest average ρ_b ($1.35 Mg/m^3$) was obtained for TD 45 cm and Without Fertilizer (WF) type. The results, as shown in Table 2, indicate a significant difference in the interaction between the number of Plastic Films (PF) and Fertilizer Type (FT) on soil bulk density (ρ_b). The lower value of ρ_b ($1.22 Mg/m^3$) was obtained between the double-plastic films and the Organic Fertilizer (OF) type, while the higher value of ρ_b ($1.32 Mg/m^3$) was obtained

without-plastic films and Without Fertilizer (WF) type. Another important finding was that interactions between Tillage Depth (TD), number of Plastic Films (PF) and Fertilizer Type (FT) showed significant differences between treatments on ρb . The lowest average for value ρb (1.20 Mg/m^3) was obtained at the interaction between TD 15 cm, double-plastic film and organic fertilizer, while the highest average value of ρb (1.38 Mg/m^3) was obtained at TD 45 cm, without-plastic films and without fertilizer type.

Influence of the Studied Factors on Soil Porosity (%)

Table 3 shows the experimental data for soil Tillage Depth (TD), number of Plastic Films (PF) and Fertilizer Type (FT) on soil porosity (Φ). The results showed a significant difference between TD on Φ . The highest value of Φ (52.78%) was obtained at TD15 cm in comparison with TD25 and 45 cm, which showed the values of 51.86 and 50.30%, respectively. The reason for this result might be the reduced soil porosity for increased bulk density when increasing tillage depth. This finding is in agreement with the result obtained by (Alam and Salahin, 2013). There was a significant positive correlation between numbers of Plastic Films (PF) and soil porosity (Φ). The highest value of Φ (52.70%) was obtained with the double-plastic films in comparison with the single-plastic films and without plastic films, which showed the values of 51.82 and 50.43% respectively. The reason for this finding may be that the soil of the double-plastic film has the lowest ρb compared with the soil of the single-plastic films and without plastic films. Another reason could be that the soil of the double-plastic film had high temperature storage for soil, which led to the decomposition of the organic fertilizer by microorganisms. This would have decreased soil bulk density and increased soil porosity, compared with other treatments, a finding that is in agreement with (Merante *et al.*, 2017; Keesstra *et al.*, 2016). Further analysis showed a significant difference in the effect of fertilizer type on soil porosity (Φ). The higher value of Φ (52.57%) was obtained with Organic Fertilizer (OF) in comparison with Chemical Fertilizer (CF) and Without Fertilizer (WF) (51.73 and 50.64%, respectively). The reason for this result may be that the soil with organic fertilizer has a lower soil bulk density (ρb), which leads to increased porosity (Φ). These results agree with the findings of (Li *et al.*, 2017; Merante *et al.*, 2017), in which the increasing organic matter of the soil led to decreased bulk density (ρb) with increased porosity (Φ). The results in Table 3 show that there were significant differences in the interaction between Tillage Depth (TD) and the number of Plastic Films (PF) on the soil porosity (Φ). The TD15 cm and double-plastic film showed the highest Φ (53.70%); the lowest value of Φ (48.92%) was obtained at TD 45 cm and without-plastic film. Furthermore, there was a strong evidence of interaction between TD and FT on Φ , which showed the highest value of Φ (53.58%) at TD15 cm and Organic

Fertilizer (OF), while the lowest value of Φ (48.04%) was obtained at TD 45 cm and Without Fertilizer (WF). Also, the results show that the interaction between the number of Plastic Films (PF) and Fertilizer Types (FT) was significantly different. The highest value of Φ (53.83%) was obtained for the interaction of the double-plastic film and Organic Fertilizer (OF), while the lowest Φ (49.95%) was obtained for without-plastic film and Without Fertilizer (WF). Furthermore, the interaction between soil Tillage Depth (TD), number of Plastic Films (PF) and Fertilizer Type (FT) showed significant differences among treatments on Φ , interaction between TD15 cm, the soil of the double-plastic film and organic fertilizer showed the highest value of Φ (54.71%), while the lowest Φ (47.92%) was obtained at TD45 cm, from the soil without-plastic film and two levels of fertilizer types Without Fertilizer (WF) and Organic Fertilizer (OF).

Influence of the Studied Factors on Soil Volumetric Moisture Content (cm^3/cm^3)

Table 4 presents the summary statistics for the influence of soil Tillage Depth (TD), number of Plastic Films (PF) and Fertilizer Types (FT) on the soil volumetric moisture content (θ). It can be seen that the Tillage Depth (TD) had a significant effect on θ . TD 25 cm was obtained at a higher value of θ ($0.196 \text{ cm}^3/\text{cm}^3$), compared with TD 45 and 15 cm, which show the values of 0.184 and $1.250 \text{ cm}^3/\text{cm}^3$, respectively. The reason for this result might be that the soil volumetric moisture content (θ) is multiplied by the soil depth and because the obtained tillage depth of 25 cm had high moisture content compared with tillage depths of 45 cm and 15 cm. The results obtained show significant differences between the numbers of Plastic Films (PF) in θ . The soil of the double-plastic film resulted in a higher value of θ ($0.231 \text{ cm}^3/\text{cm}^3$) and a lower value of $0.103 \text{ cm}^3/\text{cm}^3$ with the without-plastic film. The reason for this finding might be that the soil of the double-plastic film exhibited higher moisture content compared with other treatments because double-plastic film reduces the amount of water lost from evaporation compared with single-plastic film and without-plastic film. Surprisingly, no differences were found between fertilizer types on volumetric moisture content (θ). Statistical significance was evaluated at $p \leq 0.05$.

The results also showed that there was a significant positive correlation between Tillage Depth (TD) and number of Plastic Films (PF) with volumetric moisture content (θ). TD 25 cm and soil of the double-plastic film obtained the highest value of θ ($0.242 \text{ cm}^3/\text{cm}^3$); while the lowest value of $0.026 \text{ cm}^3/\text{cm}^3$ resulted from the interaction between TD 15 cm and the without -plastic film.

Table 3. Effect of tillage depth, number of plastic films and fertilizer type on porosity (%)

Tillage depth (cm)	Number of Plastic Films (PF)	Average Φ (%) on interaction triple			Interaction the tillage Depth and number of plastic films
		Fertilizer Type (FT)			
		Chemical	Organic	Without	
15	Single	52.83	53.96	52.45	52.57
	Double	53.2	54.71	52.83	53.70
	Without-plastic film	51.69	52.45	50.90	52.06
25	Single	51.32	52.45	50.94	51.82
	Double	52.83	53.58	50.94	52.82
	Without-plastic film	52.83	53.58	50.94	50.94
45	Single	51.69	52.45	48.67	50.81
	Double	52.83	53.20	50.18	51.19
	Without-plastic film	48.3	47.92	47.92	48.92
Average of fertilizer		51.73	52.57	50.64	LSD 0.05
Tillage depth (cm)	Fertilizers Type (FT)	Average Φ (%) on Interaction tillage depth and fertilizer type		Average Φ (%) on the Tillage Depth (TD)	Tillage depth = 0.855, Number of plastic films = 0.889
15	Chemical	53.08		52.78	Fertilizer type = 0.936
	Organic	53.58			Tillage depth \times number of plastic film = 0.646
	Without	51.68			Tillage depth \times fertilizer Type = 0.823
25	Chemical	51.57		51.86	Number of plastic film \times Fertilizer type = 0.869
	Organic	52.57			Tillage depth \times number of Plastic film \times fertilizer Type = 0.369
	Without	51.57			
45	Chemical	50.81		50.3	
	Organic	52.07			
	Without	48.04			
Number of Plastic Films (PF)	Fertilizer Type (FT)	Average Φ (%) on interaction the number of plastic films and fertilizer type		Average Φ (%) on the number of plastic films	
Single	Chemical	51.94		51.82	
	Organic	52.94			
	Without	50.68			
Double	Chemical	52.95		52.70	
	Organic	53.83			
	Without	51.31			
Without-plastic film	Chemical	50.31		50.43	
	Organic	51.06			
	Without	49.95			

In addition, it can be seen from the data in Table 4 that the interaction TD 25 cm and Without Fertilizer (WF) type obtained the highest value of θ ($0.203 \text{ cm}^3/\text{cm}^3$), lowest value ($0.124 \text{ cm}^3/\text{cm}^3$) when interaction TD 15 cm and Without Fertilizer (WF) type. The interaction between number of Plastic Films (PF) and Fertilizer Type (FT) showed significant differences between a combination of double-plastic and Without Fertilizer (WF) to other treatments, obtained the highest value of θ ($0.238 \text{ cm}^3/\text{cm}^3$); while the lowest value of θ showed at interaction between soil without-plastic film and without fertilizer type ($0.085 \text{ cm}^3/\text{cm}^3$).

Furthermore, this finding confirms that triple interaction causes significant difference in the value of θ . The obtained interaction between TD 25 cm, soil of the double-plastic

film and Without Fertilizer (WF) type at the highest value ($0.262 \text{ cm}^3/\text{cm}^3$) and the lowest value ($0.006 \text{ cm}^3/\text{cm}^3$) resulted in triple interaction TD 15 cm, soil of the without-plastic film and Organic Fertilizer (OF) type.

Influence of the Studied Factors on Soil Thermal Diffusivity (m^2/sec)

Table 5 shows the results obtained from the preliminary analysis of the influence of soil Tillage Depth (TD), number of Plastic Films (PF) and Fertilizer Type (FT) on soil thermal diffusivity (D). The results showed a significant effect of TD on the D . The highest value of D ($1.94 \times 10^{-6} \text{ m}^2/\text{sec}$) was obtained at TD 45 cm in comparison with the others (25 and 15 cm), which showed the values 9.65×10^{-7} and $1.24 \times 10^{-6} \text{ m}^2/\text{sec}$, respectively.

Table 4. Shows the effect of tillage depth, number of plastic films and fertilizer type on soil volumetric moisture content (cm^3/cm^3)

Tillage Depth (cm)	Number of Plastic Films (PF)	Average θ (cm^3/cm^3) on Interaction triple			Interaction the tillage depth and x number of plastic films
		Fertilizer Type (FT)			
		Chemical	Organic	Without	
15	Single	0.137	0.156	0.116	0.136
	Double	0.251	0.222	0.216	0.229
	Without-plastic film	0.033	0.006	0.040	0.026
25	Single	0.199	0.209	0.208	0.205
	Double	0.227	0.238	0.262	0.242
	Without-plastic film	0.129	0.152	0.141	0.140
45	Single	0.226	0.147	0.193	0.188
	Double	0.210	0.218	0.238	0.222
	Without-plastic film	0.166	0.121	0.142	0.143
Average of fertilizer Tillage Depth (cm)	Fertilizer Types (FT)	0.160	0.172		LSD 0.05
		Average θ (cm^3/cm^3) on interaction tillage depth and fertilizer type		Average θ (cm^3/cm^3) on the tillage depth	Tillage depth = 0.035 Number of plastic Films = 0.025 Fertilizer type = N.S Tillage depth \times number of plastic films = 0.018 Tillage depth \times fertilizer Type = 0.040 Number of plastic films \times Fertilizer = 0.025 Tillage depth \times number of plastic films \times Fertilizer types = 0.019
25	Organic	0.128			
	Without	0.124			
	Chemical	0.192		0.196	
	Organic	0.192			
45	Without	0.203			
	Chemical	0.200		0.184	
	Organic	0.162			
	Without	0.191			
Number of Plastic Films (PF)	Fertilizer Type (FT)	Average θ (cm^3/cm^3) on the interaction number of plastic films and fertilizer type		Average θ (cm^3/cm^3) on the number of plastic films	
	Chemical	0.187		0.176	
Single	Organic	0.170			
	Without	0.172			
Double	Chemical	0.229		0.231	
	Organic	0.226			
	Without	0.238			
Without-plastic film	Chemical	0.108		0.103	
	Organic	0.117			
	Without	0.085			

The reason for this result might be because the TD 45 cm exhibited higher bulk density ρ_b , compared with TD 25 and 15 cm, D is increased by increasing ρ_b . This finding agrees with the findings of (Levy and Schmidt, 2016; Miyajima *et al.*, 2015; Usowicz *et al.* 2016). The number of Plastic Films (PF) showed significant differences in D . The soil of the without-plastic films showed the highest value of D at $4.44 \times 10^{-6} \text{ m}^2/\text{sec}$ in comparison with soil covered by single-plastic films and double-plastic film, which showed the values 1.90×10^{-6} and $7.76 \times 10^{-7} \text{ m}^2/\text{sec}$, respectively. The reason for this finding might be because the soil in the without-plastic film presented higher bulk density (ρ_b), which led to increased D , one of the most common factors to impact on soil thermal diffusivity. These results support the findings of (Tong *et al.*, 2017).

The results showed no significant difference between Fertilizer Types (FT) on soil thermal diffusivity (D). From the data in Table 5, strong evidence of D was found at the

interaction between the Tillage Depth (TD) and the number of soil- plastic film on the soil thermal diffusivity (D). The TD15 cm and without-plastic film showed the higher value of D ($1.09 \times 10^{-5} \text{ m}^2/\text{sec}$) and the lower value D ($5.86 \times 10^{-7} \text{ m}^2/\text{sec}$) was obtained at the interaction of TD 15 cm and the double-plastic film. Furthermore, it can be seen from the data that there was a significant positive correlation between Tillage Depth (TD) and Fertilizer Type (FT), indicating interaction at TD 45 cm and Organic Fertilizer (OF) obtained the highest D of $1.09 \times 10^{-6} \text{ m}^2/\text{sec}$. The lowest value ($9.63 \times 10^{-7} \text{ m}^2/\text{sec}$) resulted from interaction at TD 25 cm and Chemical Fertilizer (CF) type. Interaction between the number of Plastic Films (PF) and Fertilizer Types (FT) on soil thermal diffusivity (D), the single-plastic film and the Organic Fertilizer (OF) type showed the highest value of D ($1.00 \times 10^{-6} \text{ m}^2/\text{sec}$) and the lowest value ($8.27 \times 10^{-7} \text{ m}^2/\text{sec}$) obtained at soil double-plastic film and without Fertilizer Type (WF).

Table 5. Effect of depth tillage, number of plastic films and fertilizer type on soil thermal diffusivity (m^2/sec)

Tillage Depth (cm) (TD)	Number of Plastic Films (PF)	Average D (m^2/s) on interaction triple Fertilizer Type (FT)			Interaction the tillage depth and number of plastic films
		Chemical	Organic	Without	
15	Single	1.14×10^{-6}	1.01×10^{-6}	1.20×10^{-6}	1.12×10^{-6}
	Double	7.90×10^{-8}	8.10×10^{-7}	8.70×10^{-7}	5.86×10^{-7}
	Without-plastic film	4.56×10^{-6}	2.48×10^{-5}	3.47×10^{-6}	1.09×10^{-5}
25	Single	9.50×10^{-7}	9.00×10^{-7}	9.40×10^{-7}	9.30×10^{-7}
	Double	8.50×10^{-7}	8.11×10^{-7}	8.29×10^{-7}	8.30×10^{-7}
	Without-plastic film	1.09×10^{-6}	1.16×10^{-6}	1.16×10^{-6}	1.13×10^{-6}
45	Single	8.83×10^{-6}	1.10×10^{-6}	1.05×10^{-6}	3.66×10^{-6}
	Double	9.80×10^{-7}	8.60×10^{-7}	9.00×10^{-7}	9.13×10^{-7}
	Without-plastic film	1.16×10^{-6}	1.33×10^{-6}	1.25×10^{-6}	1.24×10^{-6}
Average of fertilizer type		2.18×10^{-6}	3.64×10^{-6}	1.29×10^{-6}	LSD 0.05
Tillage Depth (cm) (TD)	Fertilizers Types (FT)	Average D (m^2/s) on interaction tillage (m^2/s) on the depth and fertilizer types		Average D tillage depth	Tillage depth = 2.677×10^{-6} Number of plastic films = 2.641×10^{-6} Fertilizer Types = N.S Plastic films = 2.44×10^{-6} Tillage Depth X Fertilizer Types = 2.811×10^{-6} Number of plastic films X Fertilizer types = 2.770×10^{-6} Tillage Depth X Number of Plastic Films X Fertilizer Types = 6.28×10^{-9}
15	Chemical	1.92×10^{-6}		1.24×10^{-6}	
	Organic	8.83×10^{-6}			
	Without	1.85×10^{-6}			
25	Chemical	9.63×10^{-7}		9.65×10^{-7}	
	Organic	9.56×10^{-7}			
	Without	1.84×10^{-7}			
45	Chemical	3.65×10^{-6}		1.94×10^{-6}	
	Organic	1.09×10^{-6}			
	Without	1.06×10^{-6}			
Number of Plastic Films (PF)	Fertilizer Types (FT)	Average D (m^2/s) on interaction number of plastic films and fertilizer types		Average D (m^2/s) on the number of plastic films	
Single	Chemical	3.64×10^{-6}		1.90×10^{-6}	
	Organic	1.00×10^{-6}			
	Without	1.06×10^{-6}			
Double	Chemical	6.36×10^{-7}		7.76×10^{-7}	
	Organic	8.27×10^{-7}			
	Without	1.96×10^{-6}			
Without-plastic film	Chemical	2.27×10^{-6}		4.44×10^{-6}	
	Organic	9.09×10^{-6}			
	Without	1.96×10^{-6}			

Interestingly, the triple interaction was observed at soil thermal diffusivity (D). The highest value of D at $2.48 \times 10^{-5} m^2/se$ cw as obtained as a result of interaction of TD 15 cm, without- plastic film and Organic Fertilizer (OF) type, while the lowest value ($7.90 \times 10^{-8} m^2/sec$) was obtained as a result of interaction of TD 15 cm, double-plastic film and Chemical Fertilizer (CF) type

Conclusion

This study presented an experimental investigation of soil solarisation technology on soil thermo-physical properties. The results show significant differences in the following factors: Soil bulk density (ρ_b), porosity (Φ) and gravimetric water content (θ) and soil thermal

diffusivity (D). The results of this investigation show that the tillage depth of 15 cm produces lower values of pb , θ and D ($1.25 Mg/cm^3$, $0.131 cm^3/cm^3$ and $1.24 \times 10^{-6} m^2/sec$, respectively) and a higher value of Φ (52.78%). Furthermore, D and pb are directly proportional. There was a significant positive correlation between the number of plastic film and parameters studied, the soil double plastic film was obtained lower values of pb and D for soil ($1.253 Mg/cm^3$, $7.76 \times 10^{-7} m^2/sec$). However, it recorded higher values for Φ and θ for soil (52.70% and $0.231 cm^3/cm^3$, respectively). Furthermore, It was also shown that significant differences between the types of fertilizers on pb . Organic fertilizer obtained a lower value of pb ($1.256 Mg/m^3$), compared with chemical fertilizer and without fertilizer (1.277 and $1.307 Mg/m^3$,

respectively). On the other hand the results of this study indicate no significant differences in the fertilizer type on D and θ . A positive correlation was found in the interaction between the studied factors in the parameters. Furthermore, D increased with increasing soil bulk density (ρ_b) and tillage depth. Also, soil thermal diffusivity (D) was observed to increase with increasing ρ_b and TD.

Acknowledgment

We thank Will Gates (Institute for Frontier Materials, Deakin University, Melbourne, Australia) for comments that greatly improved the manuscript.

Author's Contributions

Ahmed Abed Gatea Al-Shammary: Participated in all experiments, coordinated the data-analysis and contributed to the writing of the manuscript.

Abbas Kouzani: Participated in coordinated the data-analysis and contributed to the writing of the manuscript.

Akif Kaynak, Sui Yang and Michael Norton: Participated in writing of the manuscript

Ethics

This article is original and contains unpublished material. All of the authors have read and approved the manuscript and no ethical issues involved.

References

- Al-Shammary, A.A.G. and J.N.A. Al-Sadoon, 2014. Influence of tillage depth, soil mulching systems and fertilizers on some thermal properties of silty clay soil. *Eur. J. Agric. Forestry Res.*, 2: 1-16.
- Al-Shammary, A.A.G., J.N.A. Al-Sadoon and N.R. Lahmod, 2016. Influence of the soil solarization management and fertilizer on soil temperature under different soil tillage systems. *J. Agric. Sci.*, 8: 98-98.
- Alam, M. and N. Salahin, 2013. Changes in soil physical properties and crop productivity as influenced by different tillage depths and cropping patterns. *Bangladesh J. Agric. Res.*, 38: 289-99.
- Alrtimi, A., M. Rouainia and S. Haigh, 2016. Thermal conductivity of a sandy soil. *Applied Thermal Eng.*, 106: 551-60.
- An, K., W. Wang, Y. Zhao, W. Huang and L. Chen *et al.*, 2016. Estimation from soil temperature of soil thermal diffusivity and heat flux in sub-surface layers. *Boundary-Layer Meteorol.*, 158: 473-88.
- Andújar Márquez, J.M., M.Á. Martínez Bohórquez and S. Gómez Melgar, 2016. Ground thermal diffusivity calculation by direct soil temperature measurement. Application to very low enthalpy geothermal energy systems. *Sensors*, 16: 306-306.
- Bennett, J.M., S.D. Robertson, T.A. Jensen, D.L. Antille and J. Hall, 2017. A comparative study of conventional and controlled traffic in irrigated cotton: I. Heavy machinery impact on the soil resource. *Soil Tillage Res.*, 168: 143-54.
- Tamminen, P. and M. Starr, 1994. Bulk density of forested mineral soils. *Silva Fennica*. DOI: 10.14214/sf.a9162
- Celik, I., H. Gunal, M. Budak and C. Akpınar, 2010. Effects of long-term organic and mineral fertilizers on bulk density and penetration resistance in semi-arid Mediterranean soil conditions. *Geoderma*, 160: 236-43.
- Cerdà, A., Ó. González-Pelayo, A. Giménez-Morera, A. Jordán and P. Pereira *et al.*, 2016. Use of barley straw residues to avoid high erosion and runoff rates on persimmon plantations in Eastern Spain under low frequency-high magnitude simulated rainfall events. *Soil Res.*, 54: 154-65.
- Chaudhari, P.R., D.V. Ahire, V.D. Ahire, M. Chkravarty and S. Maity, 2013. Soil bulk density as related to soil texture, organic matter content and available total nutrients of Coimbatore soil. *Int. J. Scientific Res. Public.*, 3: 1-8.
- Conant, R.T., M.G. Ryan, G.I. Ågren, H.E. Birge and E.A. Davidson *et al.*, 2011. Temperature and soil organic matter decomposition rates—synthesis of current knowledge and a way forward. *Global Change Biol.*, 17: 3392-404.
- Dec, D., J. Dörner and R. Horn, 2009. Effect of soil management on their thermal properties. *Revista De La Ciencia Del Suelo Y Nutrición Vegetal*, 9: 26-39.
- Evvett, S.R., N. Agam, W.P. Kustas, P.D. Colaizzi and R.C. Schwartz, 2012. Soil profile method for soil thermal diffusivity, conductivity and heat flux: Comparison to soil heat flux plates. *Adv. Water Resources*, 50: 41-54.
- Gan, L., X. Peng, S. Peth and R. Horn, 2012. Effects of grazing intensity on soil thermal properties and heat flux under *Leymus chinensis* and *Stipa grandis* vegetation in Inner Mongolia, China. *Soil Tillage Res.*, 118: 147-58.
- Genesio, L., F. Miglietta, E. Lugato, S. Baronti and M. Pieri *et al.*, 2012. Surface albedo following biochar application in durum wheat. *Environ. Res. Lett.*, 7: 014025-014025.
- Gnatowski, T., 2009. Analysis of thermal diffusivity data determined for selected organic topsoil layer. *Annals Warsaw University Life Sciences-SGGW. Land Reclam.*, 41: 95-107.
- Grunwald, D., M. Kaiser, S. Junker, S. Marhan and H.P. Piepho *et al.*, 2017. Influence of elevated soil temperature and biochar application on organic matter associated with aggregate-size and density fractions in an arable soil. *Agric. Ecosyst. Environ.*, 241: 79-87.

- Hillel, D., 1998. Environmental Soil Physics: Fundamentals, Applications and Environmental Considerations. 1st Edn., Academic Press, San Diego, ISBN-10: 0080544150, pp: 771.
- Hu, G., L. Zhao, X. Wu, R. Li and T. Wu *et al.*, 2016. New Fourier-series-based analytical solution to the conduction-convection equation to calculate soil temperature, determine soil thermal properties, or estimate water flux. *Int. J. Heat Mass Transfer*, 95: 815-23.
- Ingman, M., M.V. Santelmann and B. Tilt, 2015. Agricultural water conservation in China: Plastic mulch and traditional irrigation. *Ecosy. Health Sustainability*, 1: 1-11.
- Jabran, K., M. Hussain, S. Fahad, M. Farooq and A.A. Bajwa *et al.*, 2016. Economic assessment of different mulches in conventional and water-saving rice production systems. *Environ. Sci. Pollut. Res.*, 23: 9156-63.
- Jabro, J.D., W.M. Iversen, W.B. Stevens, R.G. Evans and M.M. Mikha *et al.*, 2016. Physical and hydraulic properties of a sandy loam soil under zero, shallow and deep tillage practices. *Soil Tillage Res.*, 159: 67-72.
- Jiang, X.J., W. Liu, E. Wang, T. Zhou and P. Xin, 2017. Residual plastic mulch fragments effects on soil physical properties and water flow behavior in the Minqin Oasis, northwestern China. *Soil Tillage Res.*, 166: 100-7.
- Kader, M., M. Senge, M. Mojid and K. Ito, 2017. Recent advances in mulching materials and methods for modifying soil environment. *Soil Tillage Res.*, 168: 155-66.
- Karuma, A., P. Mtakwa, N. Amuri, C.K. Gachene and P. Gicheru, 2014. Tillage effects on selected soil physical properties in a maize-bean intercropping system in Mwala District, Kenya. *Int. Scholarly Res. Notices*.
- Keesstra, S., P. Pereira, A. Novara, E.C. Brevik and C. Azorin-Molina *et al.*, 2016. Effects of soil management techniques on soil water erosion in apricot orchards. *Sci. Total Environ.*, 551: 357-66.
- Kersten, M.S., 1949. Thermal properties of soils.
- Krishna, K.R., 2016. Push Button Agriculture: Robotics, Drones, Satellite-Guided Soil and Crop Management. 1st Edn., Apple Academic Press, Oakville, ISBN-10: 1771883057, pp: 470.
- Kroetsch, D. and C. Wang, 2007. Particle Size Distribution. *Soil Sampling and Methods of Analysis*. 2nd Edn., CRC Press.
- Levy, J.S. and L.M. Schmidt, 2016. Thermal properties of Antarctic soils: Wetting controls subsurface thermal state. *Antarctic Sci.*
- Li, D., J. Fan, X. Zhang, X. Xu and N. He *et al.*, 2016. Hydrolase kinetics to detect temperature-related changes in the rates of soil organic matter decomposition. *Eur. J. Soil Biol.*
- Li, R., R. Tao, N. Ling and G. Chu, 2017. Chemical, organic and bio-fertilizer management practices effect on soil physicochemical property and antagonistic bacteria abundance of a cotton field: Implications for soil biological quality. *Soil Tillage Res.*, 167: 30-8.
- Liang, H., K. Hu, W. Qin, Q. Zuo and Y. Zhang, 2017. Modelling the effect of mulching on soil heat transfer, water movement and crop growth for ground cover rice production system. *Field Crops Res.*, 201: 97-107.
- Logsdon, S.D., T.R. Green, J.V. Bonta, M.S. Seyfried and S.R. Evett, 2010. Comparison of electrical and thermal conductivities for soils from five states. *Soil Sci.*, 175: 573-8.
- Lu, N. and Y. Dong, 2015. Closed-form equation for thermal conductivity of unsaturated soils at room temperature. *J. Geotech. Geo Environ. Eng.*, 141: 04015016-04015016.
- Łydźba, D., A. Różański, M. Rajczakowska and D. Stefaniuk, 2016. Random checkerboard based homogenization for estimating effective thermal conductivity of fully saturated soils. *J. Rock Mech. Geotech. Eng.*
- Mahdavi, S.M., M.R. Neyshabouri, H. Fujimaki and A.M. Heris, 2017. Coupled heat and moisture transfer and evaporation in mulched soils. *Catena*, 151: 34-48.
- Makarychev, S.V. and A.G. Bolotov, 2017. Conductive and steam-diffuse constituents of thermo transfer in different soil moisture contents: case study of the Altai Region's soils. *Eurasian J. Soil Sci.*, 6: 44-44.
- Merante, P., C. Dibari, R. Ferrise, B. Sánchez and A. Iglesias *et al.*, 2017. Adopting soil organic carbon management practices in soils of varying quality: Implications and perspectives in Europe. *Soil Tillage Res.*, 165: 95-106.
- Miyajima, S., N. Uoi, T. Murata, M. Takeda and W. Morishima *et al.*, 2015. Effect of structural modification on heat transfer through man-made soils in urban green areas. *Soil Sci. Plant Nutr.*, 61: 70-87.
- Mondal, S., G. Padmakumar, V. Sharma, D.N. Singh and M.S. Baghini, 2016. A methodology to determine thermal conductivity of soils from flux measurement. *Geomechan. Geoeng.*, 11: 73-85.
- Moreno, M.M., A. Cirujeda, J. Aibar and C. Moreno, 2016. Soil thermal and productive responses of biodegradable mulch materials in a processing tomato (*Lycopersicon esculentum* Mill.) crop. *Soil Res.*, 54: 207-15.
- Mutetwa, M. and T. Mtaita, 2014. Effects of mulching and fertilizer sources on growth and yield of onion. *J. Glob. Innov. Agric. Soc. Sci.*, 2: 102-6.

- Smith, K.A., 2000. Soil and Environmental Analysis: Physical Methods, Revised and Expanded. 2nd Edn., CRC Press, ISBN-10: 0203908600, pp: 656.
- Pires, L.F., J.A. Borges, J.A. Rosa, M. Cooper and R.J. Heck *et al.*, 2017. Soil structure changes induced by tillage systems. *Soil Tillage Res.*, 165: 66-79.
- Pramanik, P., K. Bandyopadhyay, D. Bhaduri, R. Bhattacharyya and P. Aggarwal, 2015. Effect of mulch on soil thermal regimes-A review. *Int. J. Agric. Environ. Biotechnol.*, 8: 645-645.
- Qin, W., C. Hu and O. Oenema, 2015. Soil mulching significantly enhances yields and water and nitrogen use efficiencies of maize and wheat: A meta-analysis. *Scientific Rep.*, 5: 16210-16210.
- Rajeev, P. and J. Kodikara, 2016. Estimating apparent thermal diffusivity of soil using field temperature time series. *Geomechan. Geoeng.*, 11: 28-46.
- Ravazzani, G., 2017. Open hardware portable dual-probe heat-pulse sensor for measuring soil thermal properties and water content. *Comput. Electron. Agric.*, 133: 9-14.
- Ravazzani, G., D. Curti, P. Gattinoni, S.D. Valentina and A. Fiorucci *et al.*, 2015. Assessing groundwater contribution to streamflow of a large alpine river with heat tracer methods and hydrological Modelling. *River Res. Applications*.
- Roxy, M., V. Sumithranand G. Renuka, 2014. Estimation of soil moisture and its effect on soil thermal characteristics at Astronomical Observatory, Thiruvananthapuram, south Kerala. *J. Earth Syst. Sci.*, 123: 1793-807.
- Romaneckas, K., R. Romaneckiene and V. Pilipavicius, 2009. Non-chemical weed control in sugar beet crop under intensive and conservation soil tillage: I. Crop Weediness, *Romaneckas Agronomy Res.*, 7: 457-464.
- Tokoro, T., T. Ishikawa, S. Shirai and T. Nakamura, 2016. Estimation methods for thermal conductivity of sandy soil with electrical characteristics. *Soils Foundat.*, 56: 927-36.
- Tong, B., Z. Gao, R. Horton and L. Wang, 2017. Soil apparent thermal diffusivity estimated by conduction and by conduction-convection heat transfer models. *J. Hydrometeorol.*, 18: 109-18.
- Usowicz, B., J. Lipiec, M. Łukowski, W. Marczewski and J. Usowicz, 2016. The effect of biochar application on thermal properties and albedo of loess soil under grassland and fallow. *Soil Tillage Res.*, 164: 45-51.
- Usowicz, B., J. Lipiec, J.B. Usowicz and W. Marczewski, 2013. Effects of aggregate size on soil thermal conductivity: Comparison of measured and model-predicted data. *Int. J. Heat Mass Transfer.*, 57: 536-41.
- Vogt, D.J., J.P. Tilley and R.L. Edmonds, 2015. Soil and Plant Analysis for Forest Ecosystem Characterization. 1st Edn., De Gruyter, Berlin, ISBN-10: 3110381761, pp: 240.
- Williams, A., A.S. Davis, P.M. Ewing, A.S. Grandy and D.A. Kane *et al.*, 2016. A comparison of soil hydrothermal properties in zonal and uniform tillage systems across the US Corn Belt. *Geoderma*, 273: 12-9.
- Wu, Y., F. Huang, Z. Jia, X. Ren and T. Cai, 2017. Response of soil water, temperature and maize (*Zea mays* L.) production to different plastic film mulching patterns in semi-arid areas of northwest China. *Soil Tillage Res.*, 166: 113-21.
- Xiukang, W., L. Zhanbin and X. Yingying, 2015. Effects of mulching and nitrogen on soil temperature, water content, nitrate-N content and maize yield in the Loess Plateau of China. *Agric. Water Manage.*, 161: 53-64.
- Zhang, T., G. Cai, S. Liu and A.J. Puppala, 2017. Investigation on thermal characteristics and prediction models of soils. *Int. J. Heat Mass Transfer*, 106: 1074-86.
- Zhou, L., H. Feng, Y. Zhao, Z. Qi and T. Zhang *et al.*, 2017. Drip irrigation lateral spacing and mulching affects the wetting pattern, shoot-root regulation and yield of maize in a sand-layered soil. *Agric. Water Manage.*, 184: 114-23.

Appendix 1 Analysis of Variance (ANOVA table) for parameter studied

	Source of parameters	Variation	Df	Mean Anova SS	F. squares	Value	R- Square F.pr	Coefficient of variation
Soil bulk density	TD	2	0.0220	0.0110	17.19	<0.0001	0.792	1.979
	PF	2	0.0231	0.0065	10.24	0.0009		
	FT	2	0.0138	0.0069	10.80	0.0007		
Soil porosity	TD	2	28.644	14.322	12.70	0.0003	0.744	2.051
	PF	2	17.676	8.8380	7.84	0.0031		
	FT	2	19.533	9.7660	8.66	0.0020		
Volumetric moisture content	TD	2	0.0218	0.0100	10.85	0.0006	0.8276	205.030
	PF	2	0.0742	0.0370	36.82	<0.0001		
	FT	2	0.0007	0.0036	0.37	0.6980		
Soil thermal diffusivity	TD	2	4.74×10-11	2.37×10-11	1.02	0.3770	0.2270	205.030
	PF	2	6.58×10-11	3.29×10-11	1.42	0.2640		
	FT	2	2.34×10-11	1.17×10-11	0.51	0.6100		

Appendix 2. Shows specifications of the tractor used

Specifications	Explorer 85 DT
Mark	Same
Make	Italy
Engine type	Diesel
Number of cylinder/Capacity No/cc	4/4000
Max. engine speed (rated) rpm	1,400-1,600
Max. Torque Nm	257
Fuel tank capacity litres	150
Engine powerkW/hp	61/83
Standard rear tyres	420/85R30"

Appendix 3. Shows specifications of implements

Specifications	Disc plough	Disc harrow
Make	Turkey	Turkey
Width of cut m	0.95	1.5 m
Number of units	3	7*2
Tractor power requirement kw	50-60	50-60

Nomenclature

Thermo-Physical Properties	TPP
Soil Physical Properties	SPP
Soil Solarisation Technology	SST
Soil-Mulching Systems	SMS
Soil Mineral Composition	SMC
Randomized Complete Block Design	RCBD
Tillage Depth	TD
Plastic Films	PF
Soil bulk density	P_b
Soil porosity	Φ
Soil volumetric moisture content	θ
Soil thermal diffusivity	D
Soil thermal conductivity	D
Soil volumetric heat capacity	C_v
Organic Fertilizer	OF
Fertilizer Type	FT